
ASSEMBLY INSTRUCTIONS

SKU#74V06

1.UNPACK ALL PARTS FROM CARTONS CAREFULLY.
2.PULL CORD THROUGH LAMP HOLDER ATTCHED TO LAMP BODY.
3.PLACE THE SHADE ONTO LAMP HOLDER.
4.LOCK SHADE WITH SOCKET RING UNTIL TIHGTEN.

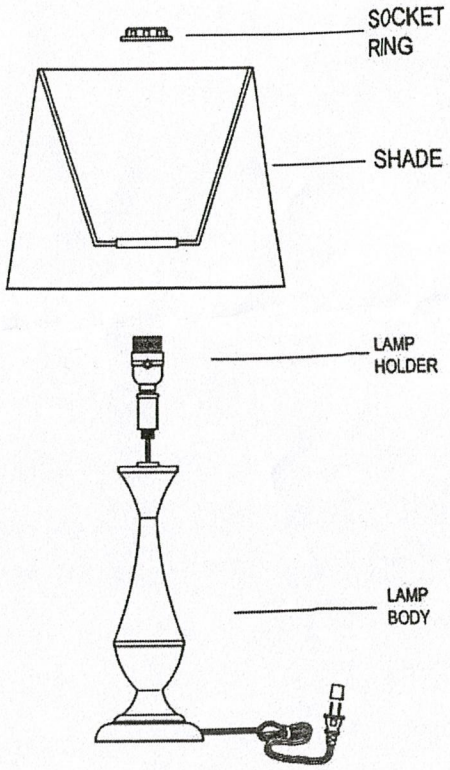

IMPORTANT SAFETY INSTRUCTIONS


THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK.THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY.IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET,REVERSE THE PLUG,IF IT STILL DOES NOT FIT,CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED.DO NOT ALTER THE PLUG.

READ & SAVE THESE INSTRUCTIONS

A LTERNATE SHADE SPECIFICATION

Critical Bulb-to-shade Spacing for Open Top / Open Bottom Shades

For your safety,follow the dimensions shown in the chart bolow.

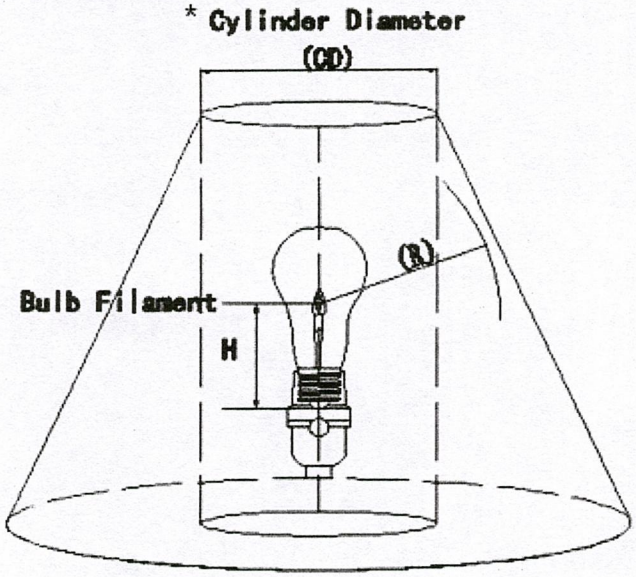

****WARNING****

The recommended shades shown on the back of this lamp package are properly sized for use with this lamp If an **Alternate Shade** is used, measurements must be checked according to the specifications below. Caution: Using an oversized shade may cause fixture to easily tip over.

AT NO TIME SHOULD THE * CYLINDER DIAMETER (CD) AND **CRITICAL RADIUS (R) MEASUREMENTS OF YOUR ALTERNATE SHADE BE LESS THAN THE MEASUREMENTS NOTED BELOW,AS THIS MAY CAUSE A FIRE HAZARD

	Lamp holder base size	Bulb		*(CD)Cylinder Diameter		**(R) Critical Radius		(H)Lamp centerline length	
		Wattage	Type	Inches	(mm)	Inches	(mm)	Inches	(mm)
	Medium	25W	A	3	(76.2)	1-5/8	(41.3)	2-3/4	(69.8)
	Medium	40W	A	3.5	(88.9)	2	(50.8)	3-1/4	(82.5)
	Medium	60W	A	3.5	(88.9)	2-1/2	(63.5)	3-1/4	(82.5)
	Medium	75W	A	4	(88.9)	2-7/8	(73.0)	3-1/4	(82.5)
	Medium	100W	A	4.5	(101.6)	3-1/2	(88.9)	3-1/4	(82.5)
	Medium	150W	A		(114.3)	4-3/4	(120.7)	3-1/4	(82.5)
	Candelabra	25W	B	3	(76.2)	1-5/8	(41.3)	2	(50.8)
	Candelabra	40W	B	3.5	(88.9)	2	(50.8)	2	(50.8)
	Candelabra	60W	B	3.5	(88.9)	2-1/2	(63.5)	2	(50.8)

Terminology

*CD= Cylinder Diameter

The minimum diameter of a cylinder,as determined by the bulb wattage in the Chart,which must be able to pass through the openings in the top and bottom of the shade.

**r = Critical Radius

The critical radius is the minimum allowable horizontal distance from the center point of the bulb filament to either side of the shade (see diagram).